

BT-700/700-M
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(MULTI-ANGLE SHAPE)

Luminance:

120,000Lux~180,000Lux

120,000Lux~180,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

560VA

Bulb of power:

150W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES



BT-700/500-M
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(MULTI-ANGLE SHAPE)

Luminance:

120,000Lux~180,000Lux

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

460VA

Bulb of power:

150W (700)

100W (500)

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm

BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES

**BT-500/500-M
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(MULTI-ANGLE SHAPE)**

Luminance:

70,000Lux~120,000Lux

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

460VA

Bulb of power:

100W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

BT-700-M
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(MULTI-ANGLE SHAPE)

Luminance:

120,000Lux~180,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

280VA

Bulb of power:

150W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES



**BT -500-M
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(MULTI-ANGLE SHAPE)**

Luminance:

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

180VA

Bulb of power:

100W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm

**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

**BT-700/700
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP**

Luminance:

120,000Lux~180,000Lux

120,000Lux~180,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

560VA

Bulb of power:

150W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**



**BT-700/500
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP**

Luminance:

120,000Lux~180,000Lux

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

460VA

Bulb of power:

150W (700)

100W (500)

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm

**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

**BT-500/500
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP**

Luminance:

70,000Lux~120,000Lux

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

460VA

Bulb of power:

100W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

**BT-700
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP**

Luminance:

120,000Lux~180,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

280VA

Bulb of power:

150W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm



**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**



**BT-500
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP**

Luminance:

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

180VA

Bulb of power:

100W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Six-dimensional joint:

360°

Lowest height of installation:

2600mm

**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

BT-500/E
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP
(EMERGENCY LAMP)

Luminance:

70,000Lux~120,000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

200VA

Bulb of power:

100W

Lamp automatic switching time:

0.2S

Color indication index:

≥97%

Emergency time:

≥3h



BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES



**BT-500/D
INTEGRAL REFLECTION
SHADOWLESS
OPERATION LAMP MOBILE**

Luminance:

70, 000Lux~120, 000Lux

Color temperature:

4300±500K

Spot diameter:

150~300 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

180VA

Bulb of power:

100W


Lamp automatic switching time:

0.2S

Color indication index:

≥97%

**BT INTEGRAL REFLECTION
SHADOWLESS OPERATION LAMP SERIES**

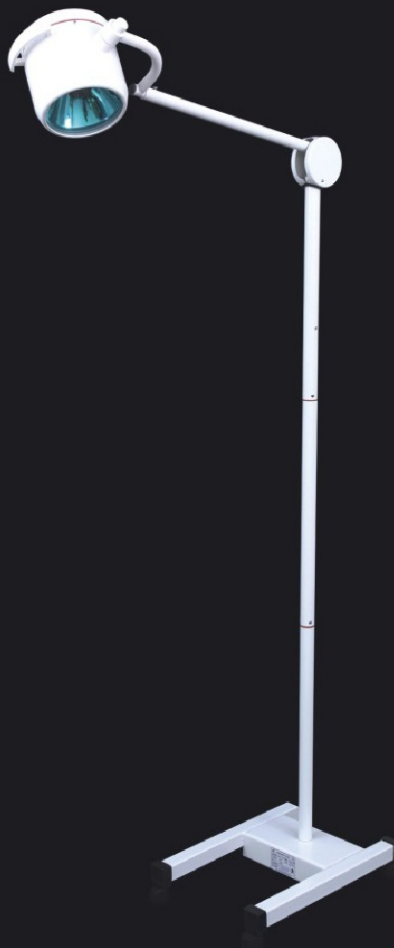

**BT -160/D
INTEGRAL REFLECTION
DIAGNOSTIC LAMP**

Luminance:

≥50,000Lux

Color temperature:

4300±500K

Spot diameter:

150~200 (mm)

Illumination depth:

≥800 (mm)

Light-adjusting mode:

Eight grade dimmer system

Temperature at surgeon's head:

≤2°

Power supply:

~220V 50Hz

Input power:

90VA

Bulb of power:

75W

Color indication index:

≥97%